

SOFT PVC⁺

For determining the migration fastness against soft PVC

For tests according to:

- + ISO 15701:2015
- + VESLIC C-4420
- + IUF 442

article 727




The use of standard sheets of plasticised polyvinylchloride makes it possible to determine the tendency of colour to migrate from the leather to synthetic materials used in conjunction with the leather.

Inspection Standard of article 727, soft PVC

Parameter	Art. 727 – specified value
Appearance	soft PVC covered in a silver gel coat
Material	according ISO 15701:2015, Annex A: A.2: Polyvinylchloride (48.0 ± 1.0) % Plasticisers (48.0 ± 1.0) % Stabiliser about 1 % Titanium dioxide about 3 %
Make-Up	sheet with 10 cuts of 50 x 30 mm



front side

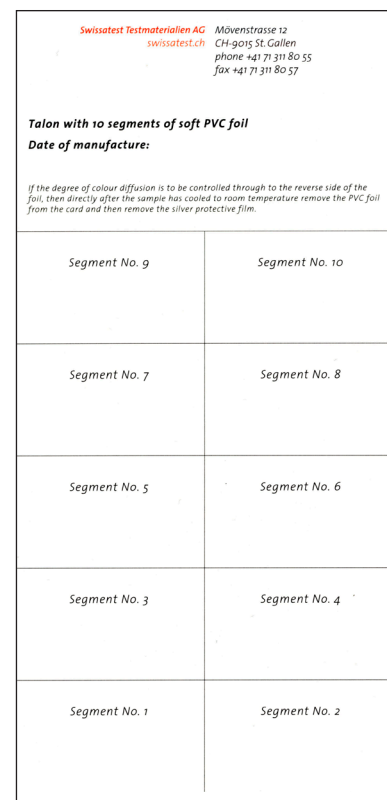

back side